



GOPHER SIGN COMPANY

SINCE 1922


GX - 4 BRACKETS




5"L x 2"W. Fits .125-gauge flat or extruded signs. No "bolt-through" installation. SET: 2 standard 5/16" set screws. Wall or post mount with 3/4" strapping or bolts, lag screws, or spikes in 2 ea. .4375" diameter holes.

GX - 3 BRACKETS

16.5"L x 8.75"H x 2"W Slots .280"W x 1.25"D. Totally NEW with longer arm. Second only to our own GX - 5 bracket. BENEFITS: No need to use extensions. Saves you installation time & money. Support is drilled and tapped with 2 ea. 5/16"-18 holes opposite .5625" non-tapped holes. Mount on wall, concrete, wood or any post with 3/4" strapping, bolts, lag screws or spikes. Includes 2 ea. standard 5/16" set screws.

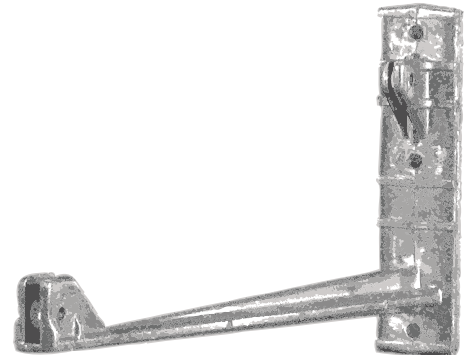

GX - 5 BRACKETS

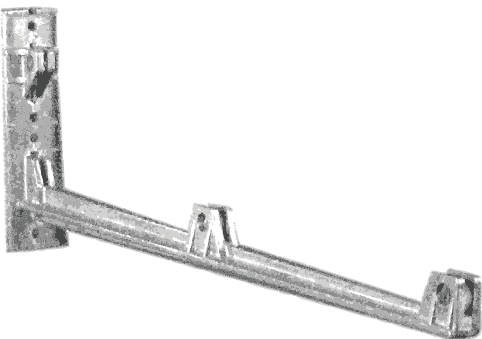

24"L x 8.25"H x 2"W slots .265"W x 1"D. Newest and largest wing mount bracket for today's larger street name blades and other signs. BENEFITS: No need to use extensions. Saves you installation time & money. Support is drilled and tapped with 3 ea. 5/16"-18 holes opposite .5625" non-tapped holes. Mount on wall, concrete, wood or any post with 3/4" strapping, bolts, lag screws or spikes. Includes 3 ea. standard 5/16" set screws.